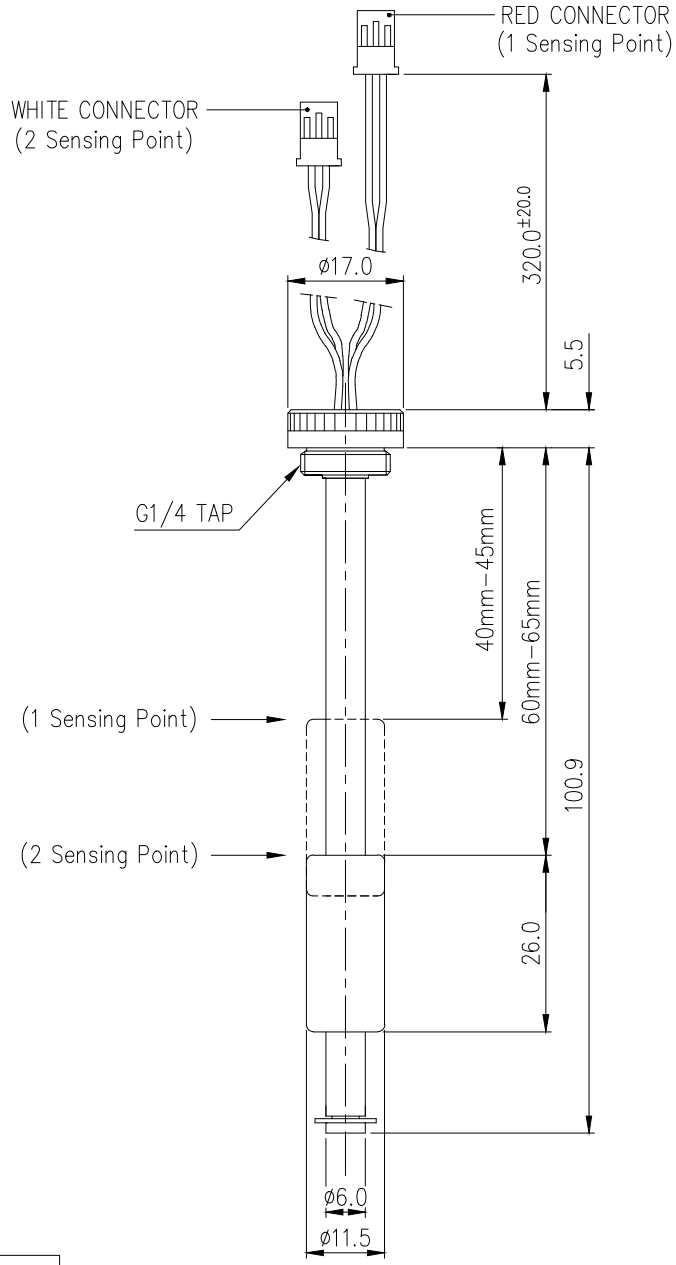

- Momentary NO magnetic switches which activate when the float reaches their location.
- Contact Rating : 10VA max.
- Switching Voltage : DC/AC 100V max.
- Switching Current : 0.5A max.

REV	DATE	CONTENTS	REVD BY	CHKD BY	APPD BY
△					

REVISION

NO.	DESCRIPTION				MATER'L	QUANTITY	REMARKS
KOOLANCE					UNIT (MM) INCH	APPAR SEN2-LVL100	
	BY	BY	BY	APPRO BY	SCALE N/S	TITLE 100mm, 2 LEVEL SENSOR DIM	
DATE					3RD ANGLE		
	S.J.LEE				CODE NO.	DWG. NO.	