File

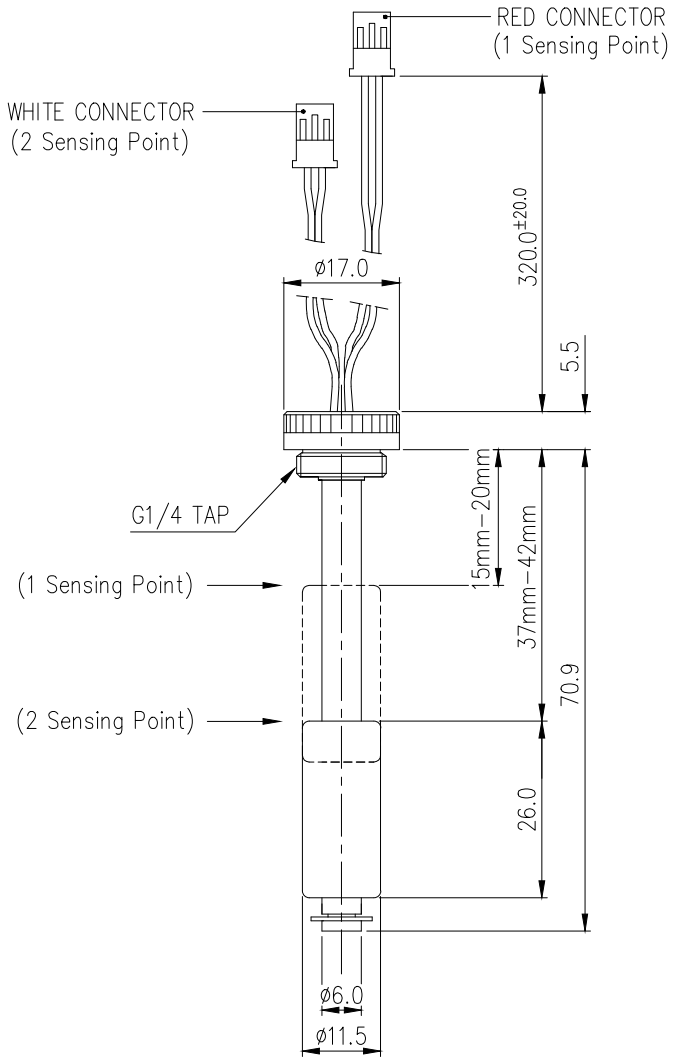

- Momentary NO magnetic switches which activate when the float reaches their location.
- Contact Rating : 10VA max.
- Switching Voltage : DC/AC 100V max.
- Switching Current : 0.5A max.

NO.	DESCRIPTION	MATER'L	QUANTITY	REMARKS
KOOLANCE		UNIT (MM) INCH	APPAR SEN2-LVL70	
	BY BY BY APPRO BY	SCALE N/S	TITLE 70mm, 2 LEVEL SENSOR DIM	
DATE		3RD ANGLE		
	S.J.LEE	CODE NO.	DWG. NO.	

REV	DATE	CONTENTS	REVD BY	CHKD BY	APPD BY

REVISION