

**QD2 Male Quick Disconnect No-Spill Coupling,
Compression for 06mm x 10mm (1/4in x 3/8in)**





Koolance patented quick disconnect no-spill coupling with automatic shutoff. 6mm (1/4in) ID male straight connection with compression fitting. It will only fit a Koolance QD2 female quick disconnect.

After pulling the ring on the female QDC side, the quick-disconnect fittings will separate. Liquid on both sides will be automatically obstructed with approximately 0.2ml freed. Coolant volume lost upon disconnection will rise with internal pressure higher than 0.5kgf/cm² (7psi).

General	
Weight	0.08 lb (0.04 kg)
Max No-Spill Pressure	0.5kgf/cm ² (7psi)
Max Pressure Tolerance @ 25 °C	8kgf/cm ² (113.8psi) connected, 8kgf/cm ² (113.8psi) disconnected
Max Temperature Tolerance	80 °C (176 °F)
Min Pressure Tolerance @ 25 °C	-1.0kgf/cm ² (-14psi)
Min Storage Temperature (*No Freezing)	-20°C (-4°F)
Seal Material	EPDM (Water/Glycol Liquids)
Wetted Materials	Nickel-Plated Brass, Stainless Steel, EPDM

QD2 (One Pair)

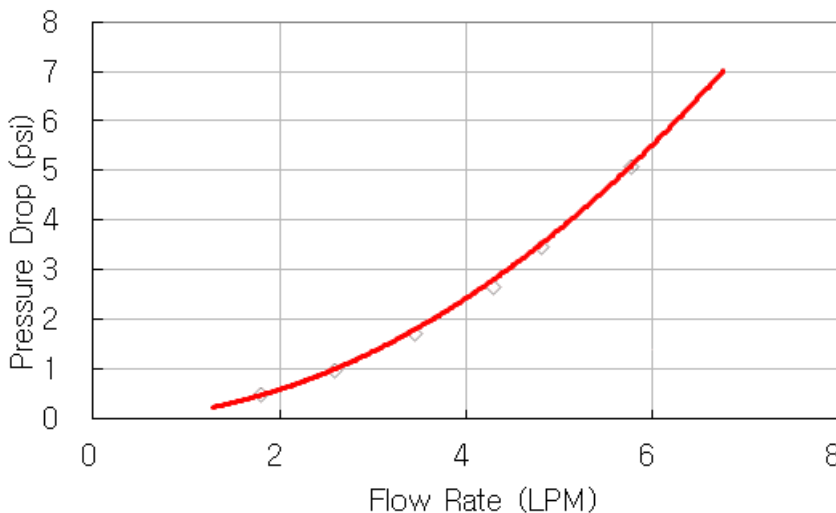

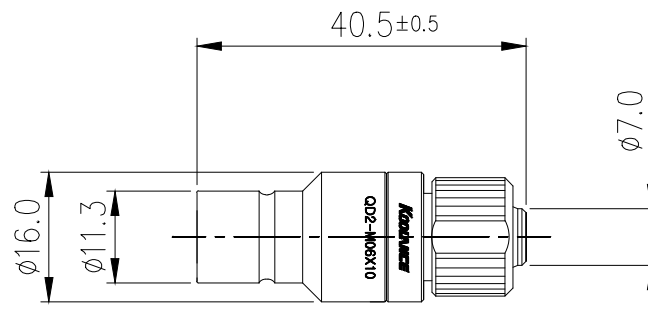

REV	DATE	CONTENTS	REVD BY	CHKD BY	APPD BY
REVISION					

NO.	DISCRIPTION				MATER'L		QUANTITY	REMARKS
	KOOLANCE .XXX .XX .X				UNIT	MM	ITEM	QD2
					SCALE	N/S	TITLE	QD2-M06x10
DATE	BY	BY	BY	APPRO BY	ANGULAR DIMENSIONS		3RD ANGLE	
					XX" XX.X"	±0.5" ±0.1"	CODE NO.	DWG. NO.
					SURFACE ROUGHNESS	SURFACE .63 SURFACE 1.6		PAGE