

www.koolance.com

Specifications Sheet

Generated: 2025-09-03

P/N: HX-CU720V-R

Radiator, 2x120mm 30-FPI Copper (Refurb)











HX-CU720V is a low profile copper core radiator designed for two 120mm fans. With a fin density of 30 FPI (fins per inch), it offers best performance with higher air flow. It has a dual pass coolant design, and is G 1/4 BSPP (parallel) thread for hose fittings. 30mm (1.18") long mounting screws are included for 25mm thick fans (see Koolance <u>radiator screw packs</u> for additional options).


General				
Weight	1.30 lb (0.59 kg)			
Fitting Thread	G 1/4 BSPP			
Max Pressure Tolerance @ 25°C	1.5kgf/cm2 (21psi)			
Max Temperature Tolerance	150°C (302°F)			
Wetted Materials	Brass/Copper			
Radiators				
Fan Capacity	2 x 120mm			
Fins Per Inch (FPI)	30			

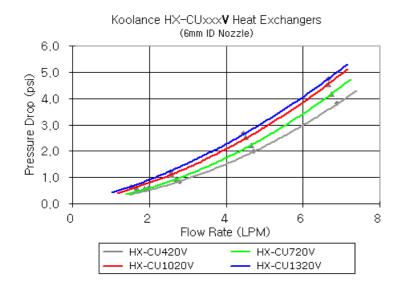


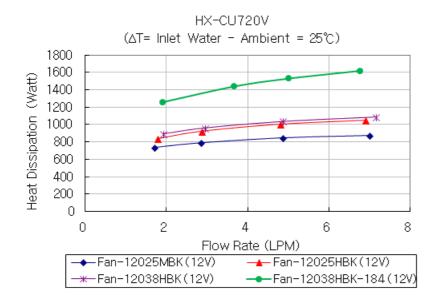

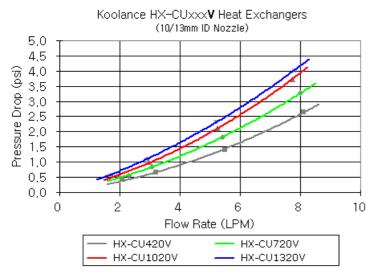

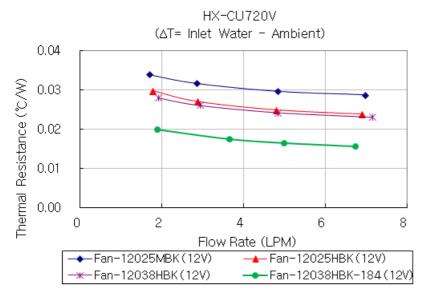

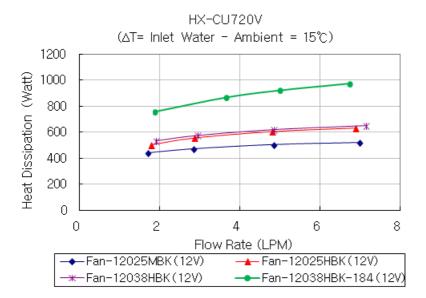

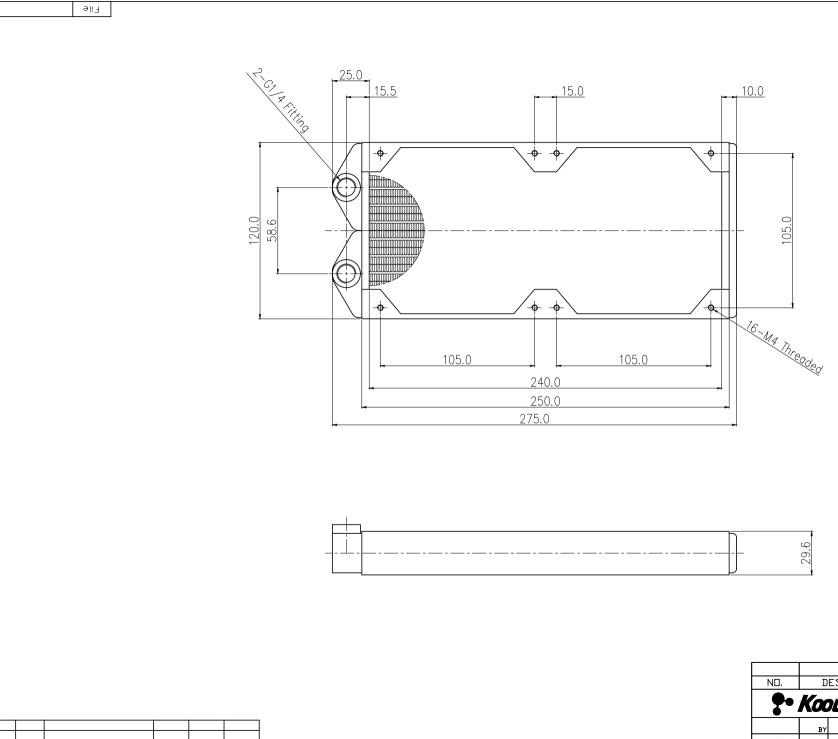

		l						l			
NO. DESCRIPTION							ΓER′L	QUANTITY		REM/	4RKS
?• KOOLANCE						UNIT	мм	ITEM	HX-CU720V		
		BY BY		APPR0		SCALE	N/S	TITLE , ,			
	DATE	ъ.	Б	БТ	В1	-	ANGLE		Ass'y	/	
		S.J.LE	E			CODE N	10.	DWG. NO.			PAGE

REV DATE CONTENTS REVD BY CHKD BY APPD BY
REVISION