





The copper core HX-CU1020H provides an approximate 1000W of added heat dissipation when coupled with three 120mm fans. With a fin density of 20 FPI (fins per inch), it is optimized for low to mid-range air flow. Horizontal (parallel) G 1/4 BSP (parallel) thread fitting sockets. 32mm (1.26") long mounting screws are included. Dual pass, 15mm (0.59") fan hole spacing.


General	
Weight	3.10 lb (1.41 kg)
Wetted Materials	Brass/Copper
Radiators	
Fins Per Inch (FPI)	20

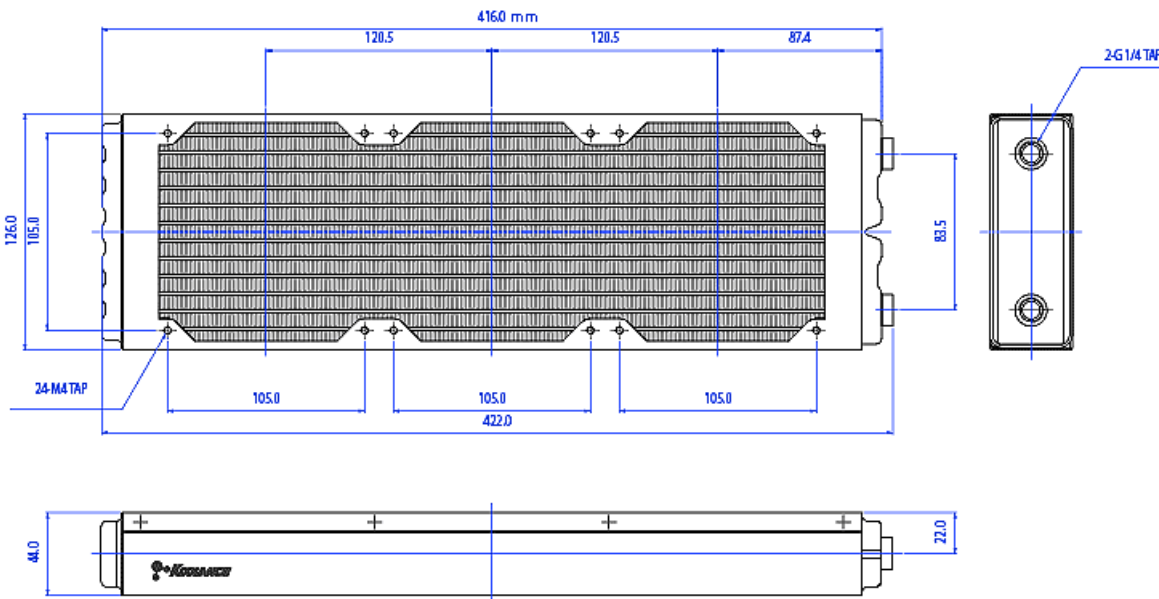


Koolance HX-CU1020H
 ($\Delta T = \text{Inlet Water} - \text{Ambient} = 25^\circ\text{C}$)

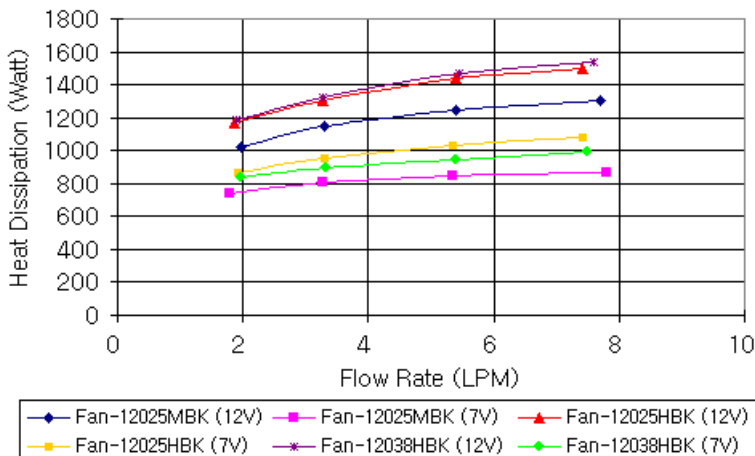

Koolance HX-CU1020H
 ($\Delta T = \text{Inlet Water} - \text{Ambient} = 15^\circ\text{C}$)

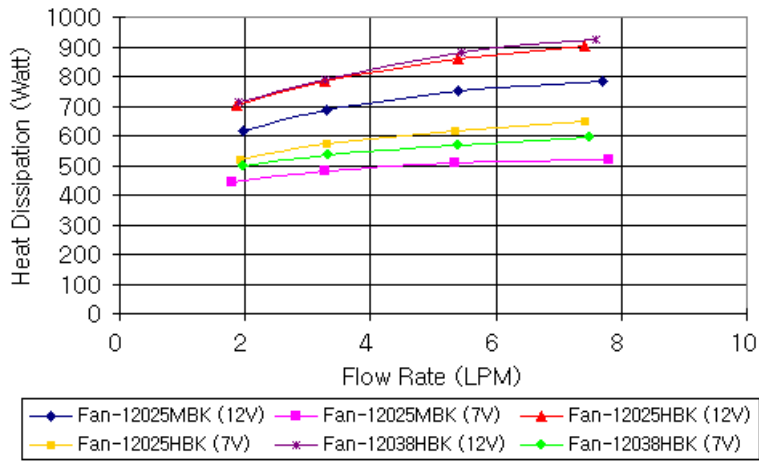

Koolance HX-CUxxxH Heat Exchangers
 (6mm ID Nozzle)

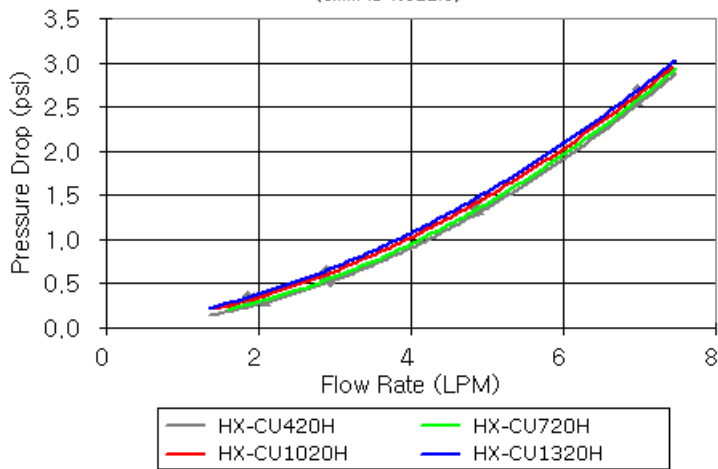

Koolance HX-CUxxxH Heat Exchangers
 (10/13mm ID Nozzle)

