





The copper core HX-CU1320H provides an approximate 1300W of added heat dissipation when coupled with four 120mm fans. With a fin density of 20 FPI (fins per inch), it is optimized for low to mid-range air flow. Horizontal (parallel) G 1/4 BSPP (parallel) thread fitting sockets. 32mm (1.26") long mounting screws are included. Dual pass, 15mm (0.59") fan hole spacing.


General	
Weight	3.75 lb (1.70 kg)
Wetted Materials	Brass/Copper
Radiators	
Fins Per Inch (FPI)	20

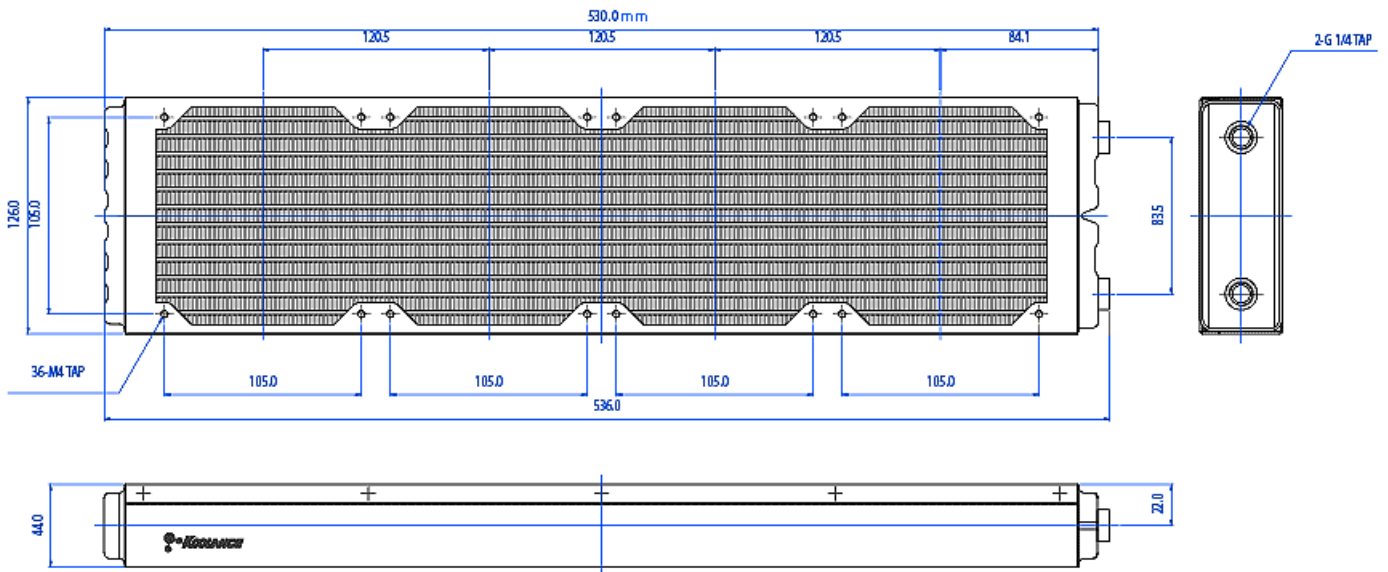


Koolance HX-CUxxxH Heat Exchangers  
(6mm ID Nozzle)

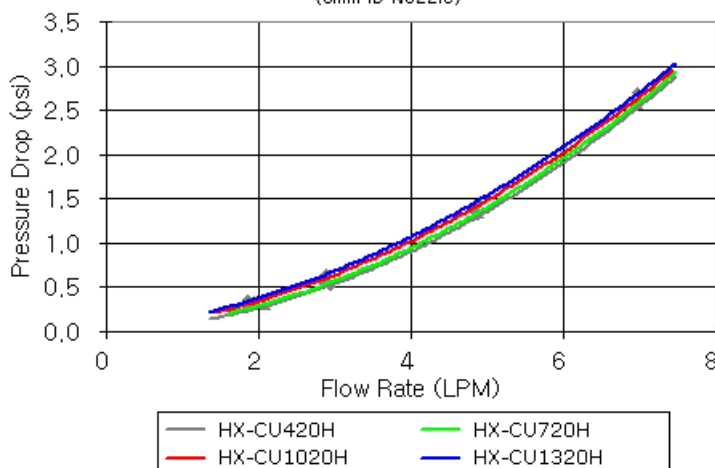

Koolance HX-CUxxxH Heat Exchangers  
(10/13mm ID Nozzle)

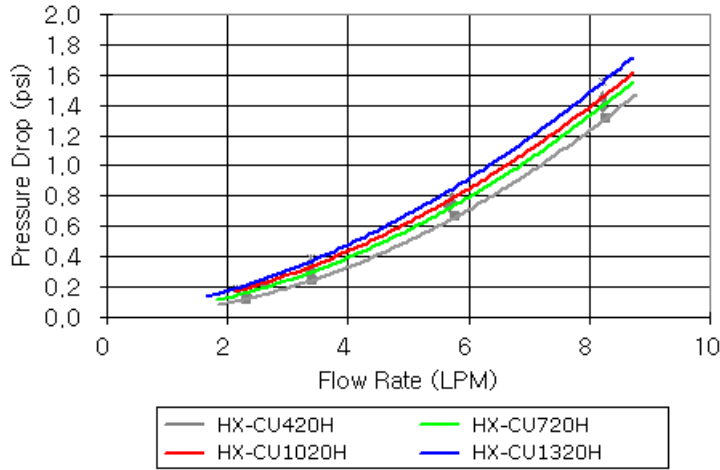

Koolance HX-CU1320H  
( $\Delta T = \text{Inlet Water} - \text{Ambient} = 15^\circ\text{C}$ )

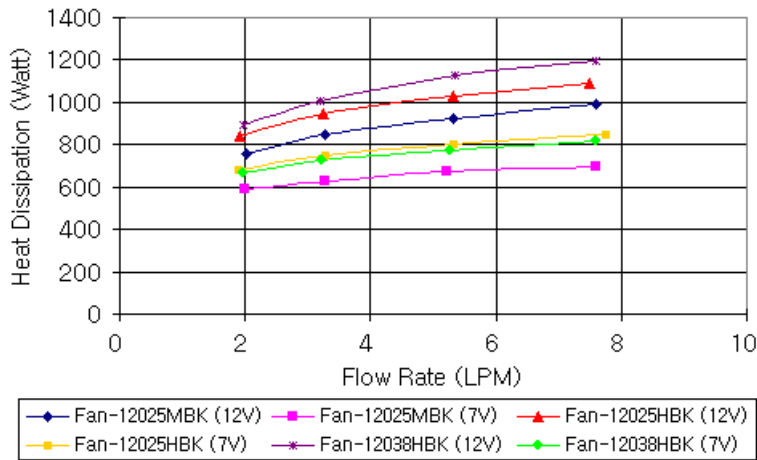

Koolance HX-CU1320H  
( $\Delta T = \text{Inlet Water} - \text{Ambient} = 25^\circ\text{C}$ )

